


2.25 in

SPI0
GND
SEL
MOSI
MISO
SCK
+V

Serial 1 Serial 2
Rx Tx GND +12V
Rx Tx GND

USB Slave and Micro SD

Ethernet and USB Host

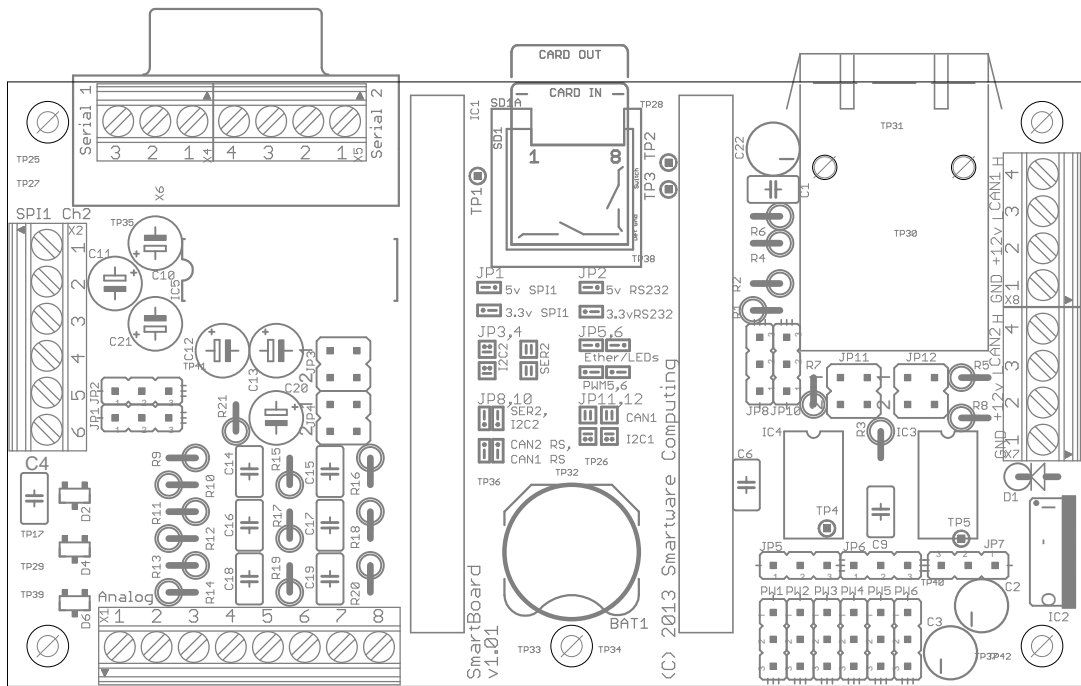

CAN-H
CAN-L
+12V
GND
CAN-H
CAN-L
+12V
GND
CAN 1
CAN 2


AIN
11
12
13/O1
14
15
16
GND
+3.3

0.15 in (fr edge each dim)

2.1 in

4.0 in

PWM1
PWM2
PWM3
PWM4
PWM5
PWM6

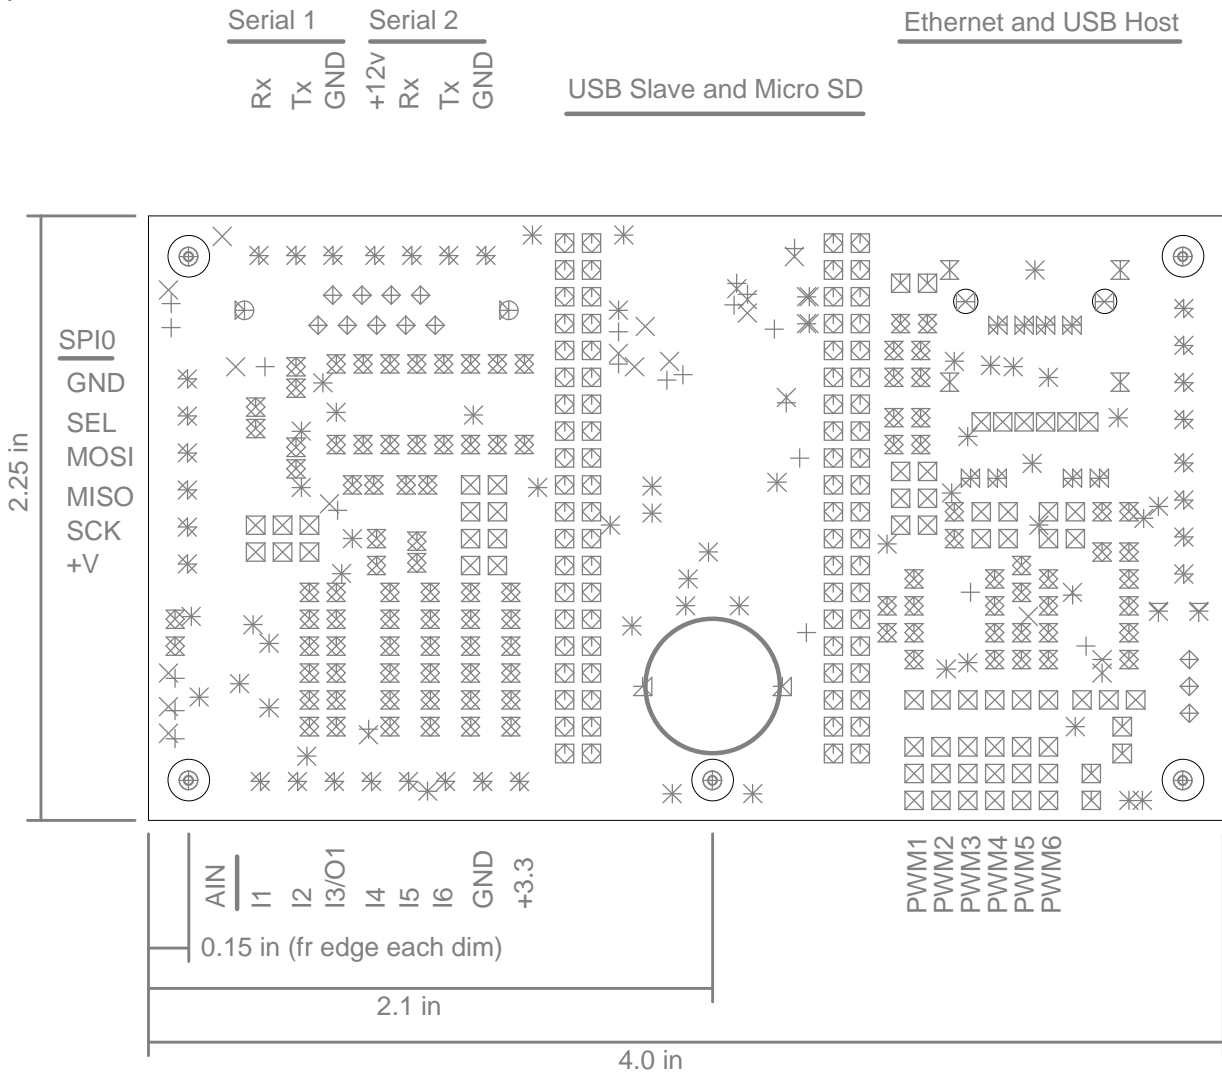

Sym	N°	Mils	MM	Qty	Plated
+	1	24	0.61	69	YES
×	2	28	0.70	6	YES
□	3	31	0.80	80	YES
◇	4	32	0.81	106	YES
⊗	5	36	0.91	61	YES
⊗	6	39	1.00	8	YES
⊕	7	40	1.02	12	YES
⊕	8	43	1.10	29	YES
*	9	52	1.32	5	YES
*	10	55	1.40	2	YES
▽	11	63	1.60	4	YES
△	12	73	1.85	2	YES
▷	13	91	2.31	2	NOT
▷	14	130	3.30	2	YES
⊕	15	156	3.96	5	NOT

